



江西明亮亚克力有限公司

JIANGXI MINGLIANG ACRYLIC CO.,LTD

地址：江西省吉安市新干县盐化城

电话：+86 0796-2881881

+86 13868552235

邮箱：jingxingbao@brightacrylic.com

网站：<https://brightacrylic.com/>

<https://brightacrylic.en.alibaba.com/>

Add: Yanhua Industry
City, Xingan County, Ji'an
City, Jiangxi Province, China

WeChat: +86 19979600808

WhatsApp: +86 19979600808

Email: sales2@brightacrylic.com

江西明亮亚克力有限公司

JIANGXI MINGLIANG ACRYLIC CO.,LTD





BRIGHT ACRYLIC

江西明亮亚克力

江西明亮亚克力有限公司
JIANGXIMINGLIANG ACRYLIC CO., LTD.

生产经验
30年

经营面积
55,000m²

年产量
30,000吨

专业工人
350人

江西明亮亚克力有限公司总部位于江西省，总占地面积55,000平方米（含分厂20,000平方米），拥有350名专业员工及8条全球领先的自动化浇铸亚克力生产线，年产能达30,000吨。生产设备及精密检测仪器均引进自英国、德国，确保生产精度与产品稳定性。

凭借将近30年行业深耕，江西明亮亚克力有限公司已跻身中国亚克力板材制造领先企业行列。

“产品以高清晰度、高透明度、稳定化学性能及优异耐候性为核心优势，全面符合ISO9001、ISO14001、SGS、ROHS及REACH等国际标准，品质获全球市场认可。”

产品远销中东、南美、美国等多个国家和地区，在海外市场建立了稳定的客户群体与良好口碑。

我们随时期待您的咨询，愿为您提供专业解答与定制化方案，携手共创价值！

30Years
experience

30,000tons
annual output

55,000m²
Factory area

350+
Professional
works

Bright Acrylic is headquartered in Jiangxi Province, with a total area of 55,000 square meters (including 20,000 square meters of the branch factory). It has 350 professional employees and 8 world-leading automated casting acrylic production lines, with an annual production capacity of 30,000 tons.

The production equipment and precision testing instruments are all imported from the UK and Germany to ensure production accuracy and product stability.



With nearly 30 years of in-depth industry experience, Bright Acrylic has become one of the leading enterprises in China's acrylic sheet manufacturing industry.

The products have core advantages of high clarity, high transparency, stable chemical properties and excellent weather resistance, fully complying with international standards such as ISO9001, ISO14001, SGS, ROHS and REACH, and their quality has been recognized by the global market.


The products are exported to many countries and regions such as South America, the Middle East and the United States, establishing a stable customer base and a good reputation in overseas markets.

We look forward to your inquiries at any time, and are willing to provide you with professional answers and customized solutions to create value together!

工厂展示：Factory Display

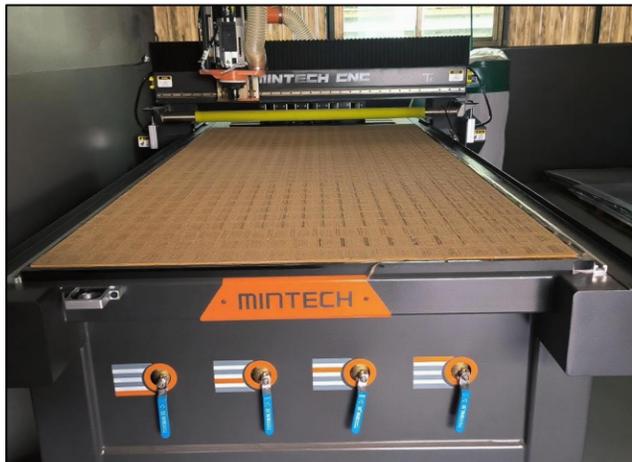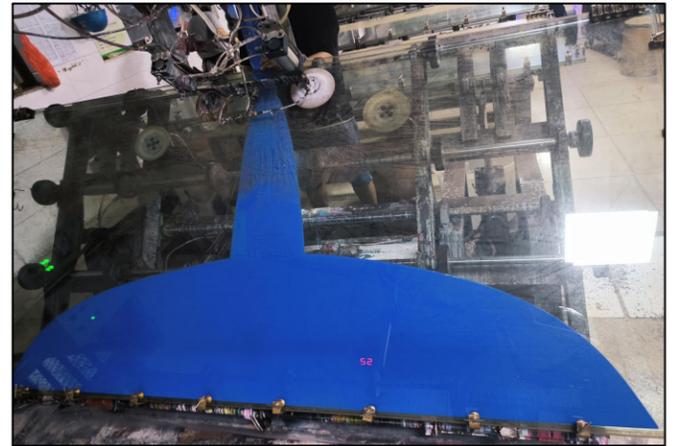

品检: Strict Quality Control

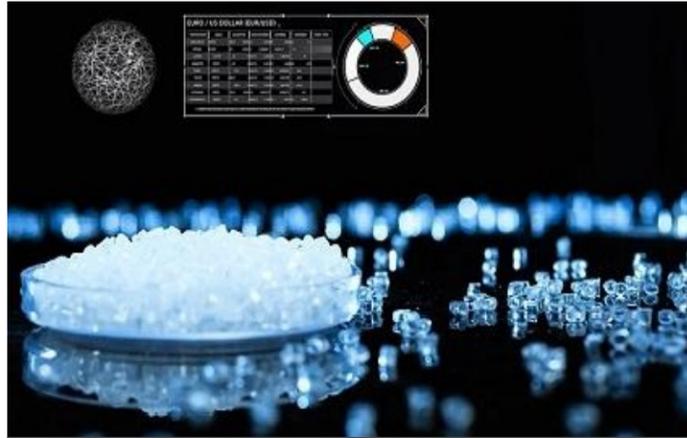

100% new virgin raw material
100% 全新料



Advanced R&D lab testing
先进实验室检测



Over 50 position to test thickness
多达50处厚度检测点



The automatic instrument of thickness measuring
自动测厚仪



Each step strictly standard processing guide
标准化操作



No dust production workshop
无尘车间

透明板

Clear Transparent Acrylic Sheet

- 93% light transmittance
93%透明度
- 100N scale rockwell hardness
100N 标度洛氏强度
- 0.3% water absorption
0.3%吸水率
- 1.49 Refractive index
1.49 折射率
- >115MPa Flexural strength
115MPa弯曲强度
- 1.2g/cm³ specific gravity
1.2g/cm³ 密度
- 2 KJ.M⁻² impact resistance
2 KJ.M⁻² 抗冲击力
- >105°C vicat softening point
>105°C 维卡软化点



彩色板



Color Transparent Acrylic Sheet

- Multiple colors can be customized
可定做多种颜色
- 100% virgin raw material
100%全新料
- Thickness ranges: 1.7-50mm
厚度范围: 1.7-50mm
- 1.2g/cm specific gravity
1.2g/cm³ 密度
- 1.49 refractive index
1.49折射率
- 100N scale rockwell hardness
100N标度洛氏硬度
- 0.3% water absorption
0.3%吸水率
- 2KJ.M⁻² Impact Resistance
2 KJ.M⁻² 抗冲击力





布板

Cloth
Acrylic Sheet

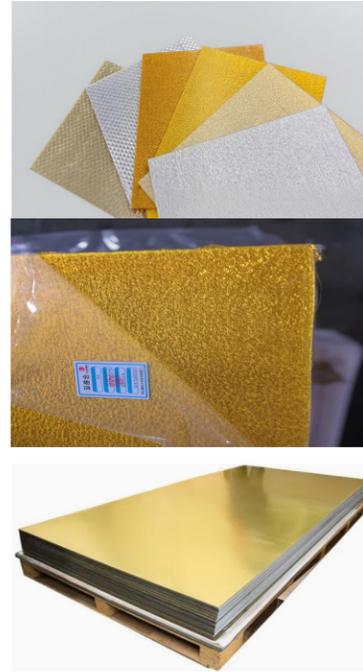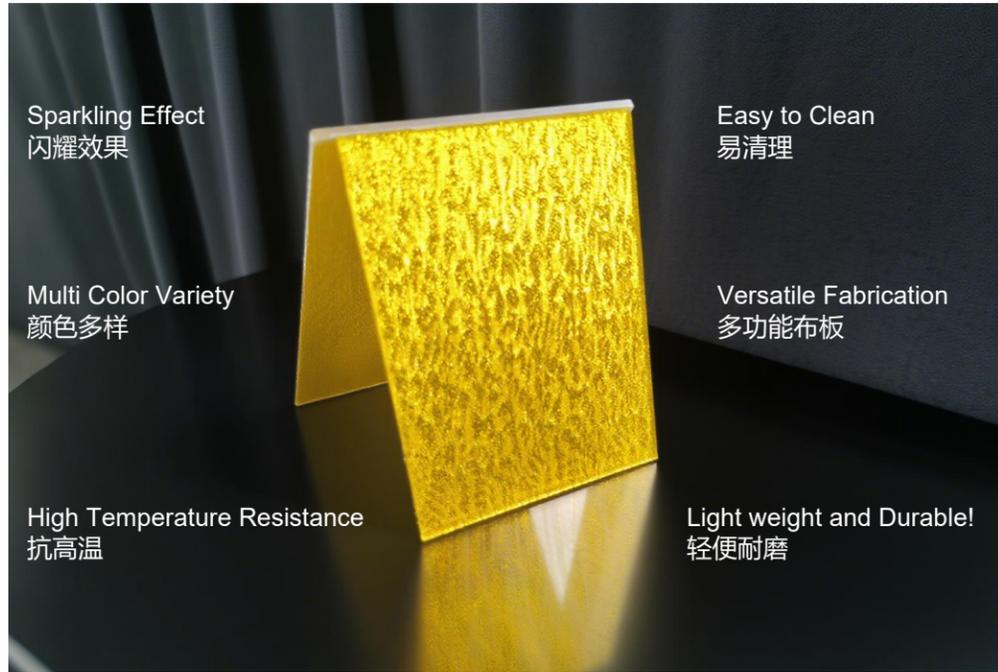

彩色透明板

Colored Transparent
Acrylic Sheet

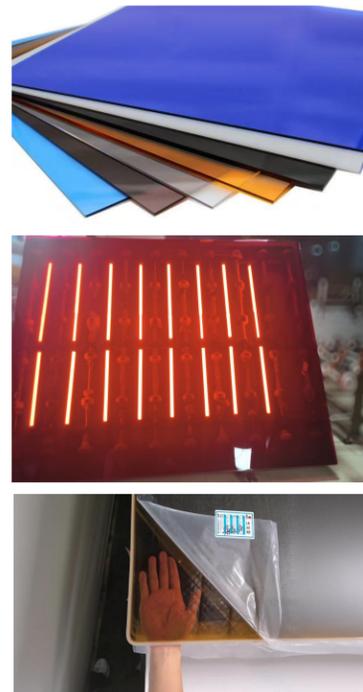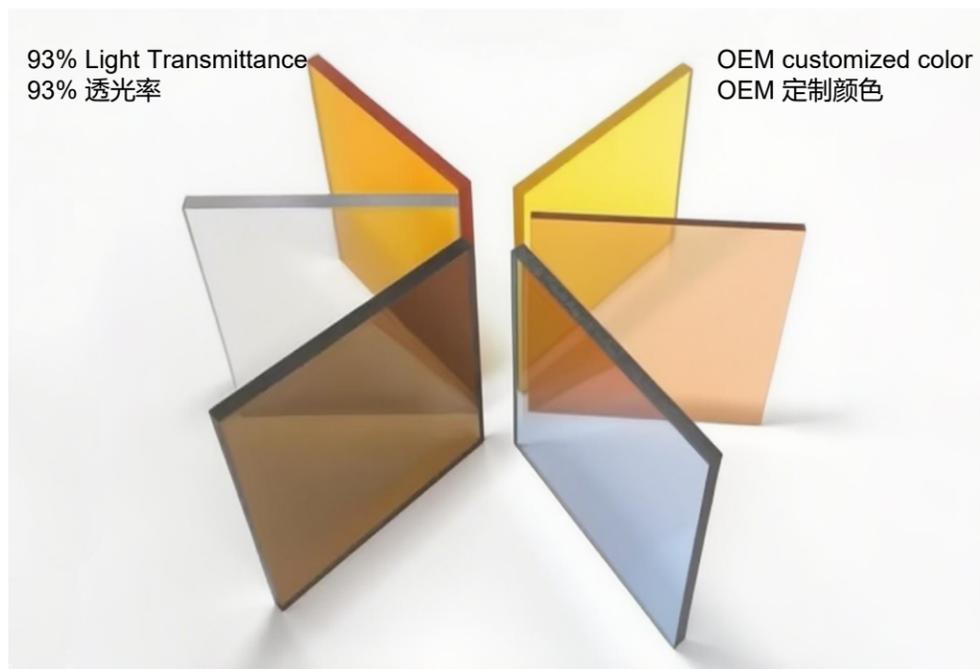

特殊亚克力板


Special
Acrylic Sheet



Special Thick Acrylic Sheet 特殊厚度亚克力板
Thickness up to 200mm, with good transparency
厚度达到200 mm, 且透明度好

Mirror Acrylic Sheet 镜面亚克力板

- High gloss finish, 高光面
- smooth and flat. 平整顺滑
- crystal-like transparency, 水晶般透明
- Mirror reflectivity up to 93%. 镜面反射率可达93%

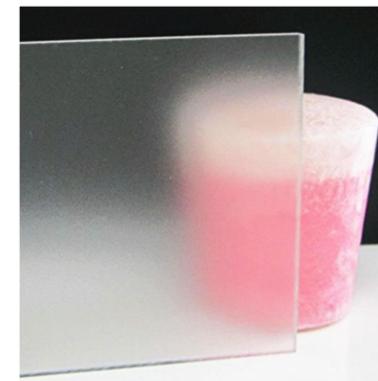

Frosted Acrylic Sheet 镜面亚克力板


- surface frosted, 表面磨砂
- middle frosted 中间磨砂
- Strong impact resistance. 抗冲击性强

Mini Letter Sheet 迷你字板


- High precision processing adaptability, 高精度加工适配性
- lightweight and easy to install, 轻量易安装
- Surface easy to clean. 表面易清洁



应用领域 Application Cases

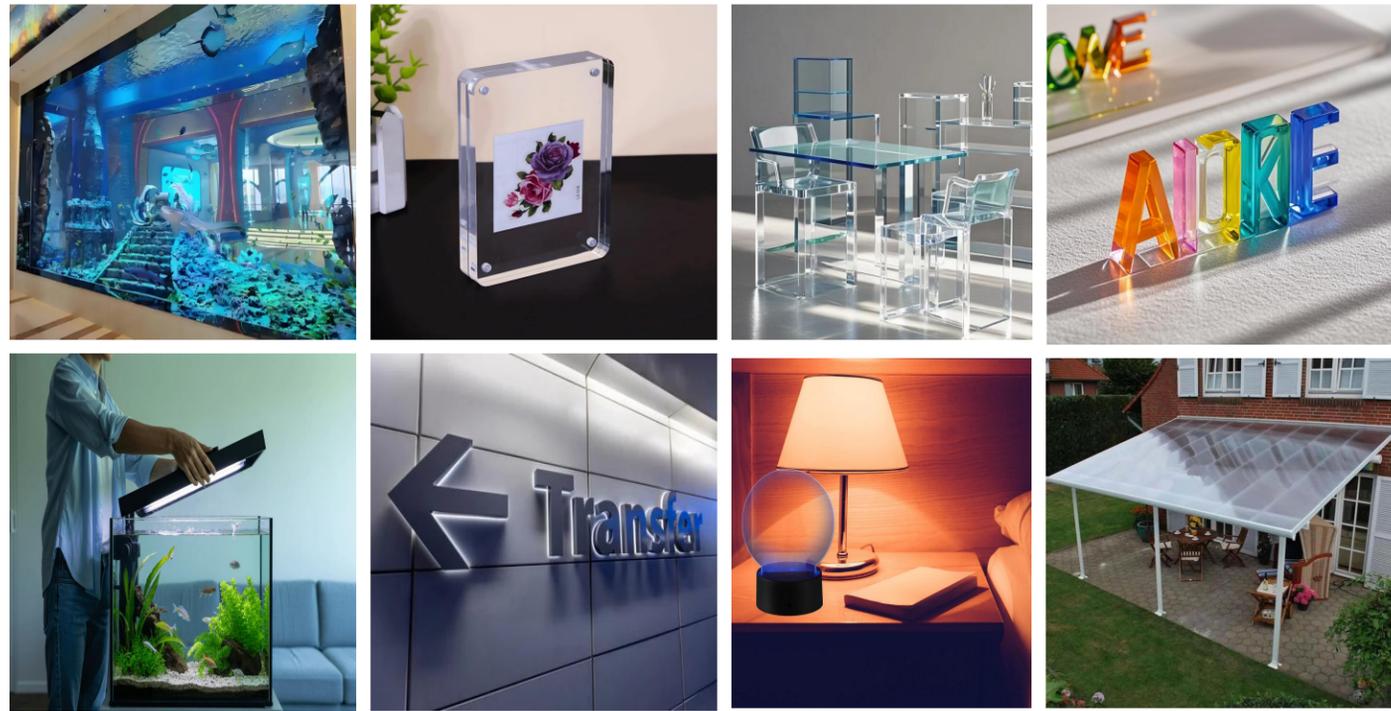

产品展示 Product Display

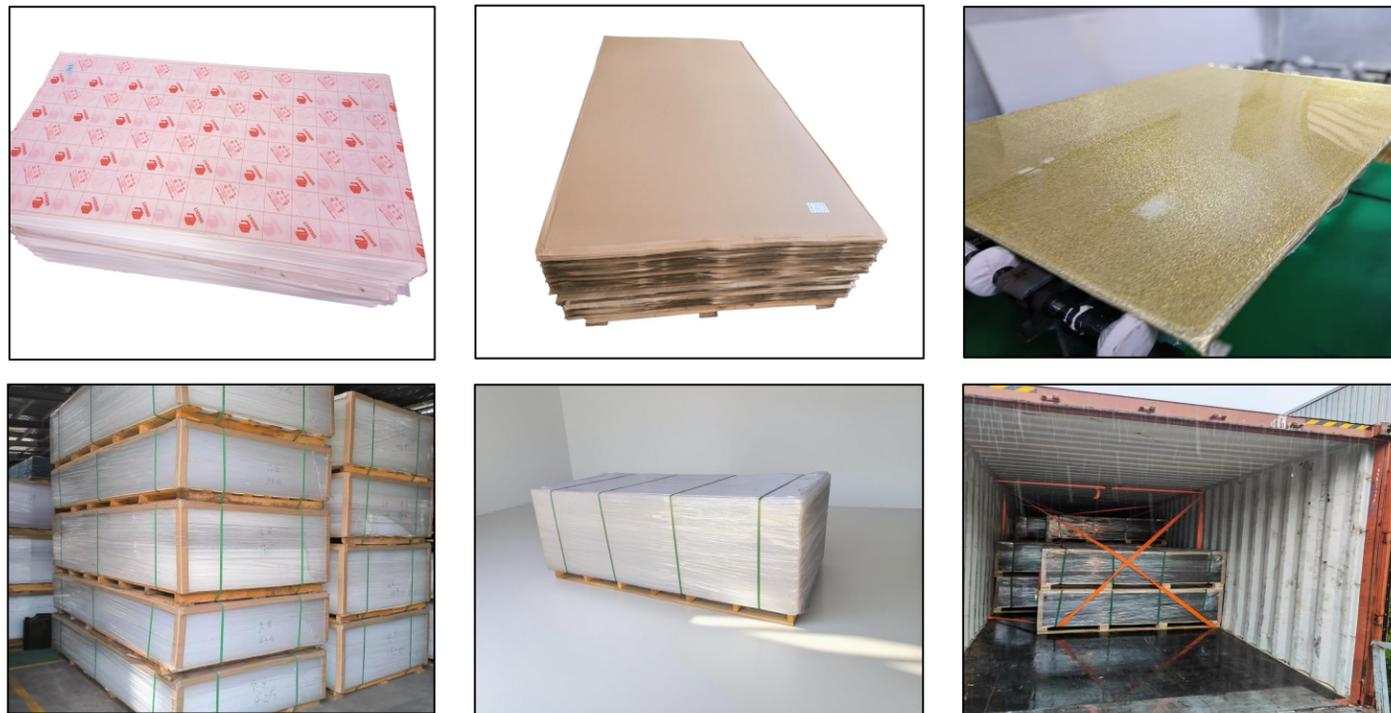

板材尺寸/Specification sheet

Model Code 模具代码	Size with tap glue/mm 含胶边尺寸/毫米	Size without edges/mm 2-12mm净尺寸/毫米
W	2050*3050	2020*3020
W1	1630*2630	1600*2600
YY	1350*2550	1320*2520
L1	1270*2490	1220*2440切边/Cut
L2	1250*2450	1220*2420切边/Cut
L3	1230*2430	1200*2400
L4	1250*2470	1220*2440切边/Cut
Q1	1250*1850	1220*1820
Q2	1230*1830	1200*1800
Q3	1250*1860	1220*1830切边/Cut
Q4	1300*1910	1270*1880切边/Cut
单/双磨砂 Single-sided Double-sided frosted	1250*2450	1220*2420切边/Cut

Remark:

1. OEM Customized Dimension basing on your need.


根据需求OEM定制尺寸

3. As to small order with customized color, it would be unavoidable to make small discrepancy on amount and color due to the complexity of production. If so, please tolerate and accept.

对于定制颜色的小订单，由于生产的复杂性，在数量和颜色上出现小的差异是不可避免的，请宽容和接受。

我们提供超过80种颜色，且支持OEM定制颜色
We offer over 80 colors and OEM colors are available

颜色透明板
Colored Transparent
acrylic sheet



MingLiang 101 MingLiang 102 MingLiang 992



MingLiang 8503 MingLiang 8522 MingLiang 0124 MingLiang 3230 MingLiang Z80199 MingLiang M532



MingLiang F10278 MingLiang D025 MingLiang R20254 MingLiang 0584 MingLiang C526 MingLiang C5290




MingLiang 525 MingLiang M60023 MingLiang 301 MingLiang 3050 MingLiang 302 MingLiang 3040




MingLiang 3059 MingLiang M60045 MingLiang T9020 MingLiang T9010 MingLiang 366 MingLiang C3302




MingLiang 0900 MingLiang 0522-2 MingLiang Z80185 MingLiang M60042 MingLiang M60028 MingLiang 991

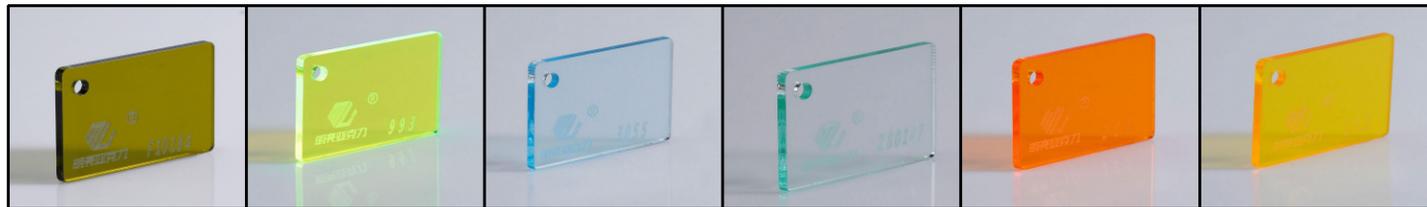

MingLiang F10184 MingLiang 993 MingLiang 3055 MingLiang Z80147 MingLiang 202 MingLiang 212

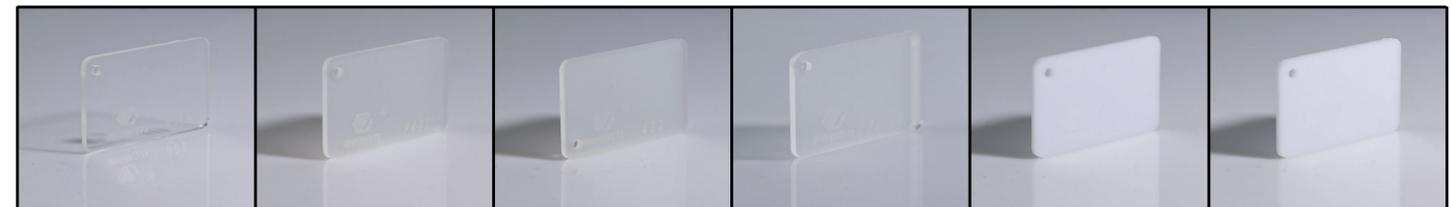

MingLiang 000 MingLiang P422 MingLiang 422 MingLiang PP00 MingLiang P4250A MingLiang 4025A

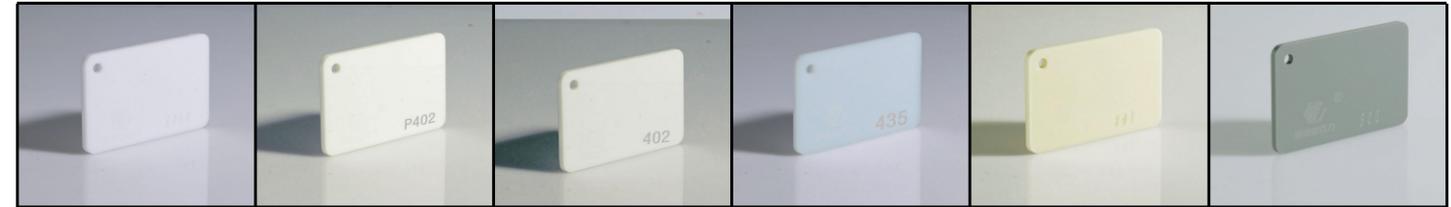

MingLiang 5444 MingLiang P402 MingLiang 402 MingLiang 435 MingLiang 801 MingLiang 500




MingLiang 5028 MingLiang P5028 MingLiang P9900 MingLiang 814 MingLiang 617 MingLiang 635




MingLiang 348 MingLiang 184 MingLiang 7474 MingLiang 3228 MingLiang 322 MingLiang 327




MingLiang P9T29 MingLiang 835 MingLiang 138 MingLiang 100 MingLiang 235 MingLiang 215

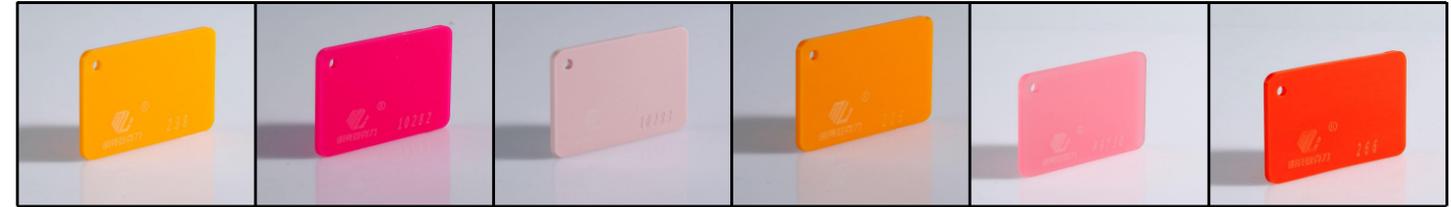


MingLiang 238 MingLiang 10282 MingLiang 10283 MingLiang 206 MingLiang P9T30 MingLiang 266

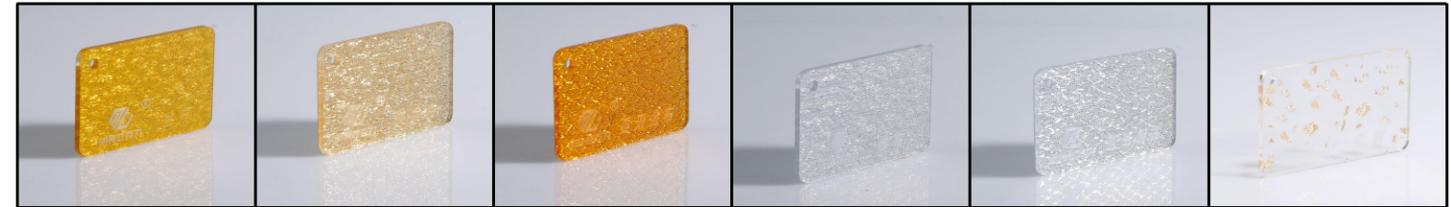

MingLiang 金布 MingLiang 淡金布 MingLiang 菱形金布 MingLiang 银布 MingLiang 菱形银布 MingLiang 金箔

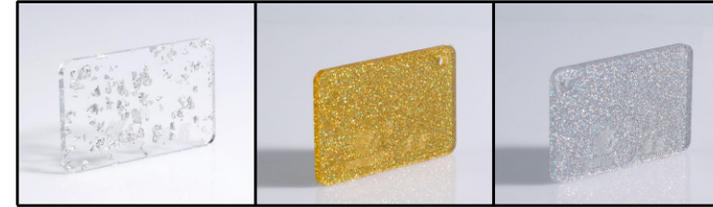

MingLiang 银箔 MingLiang 金粉 MingLiang 银粉



实色板
Solid Color
acrylic sheet

明亮亚克力板的物理特性

Physical Property of Bright Acrylic Sheet

	PROPERTY 特性	UNIT 单位	VALUE 数值
MECHANICAL 机械性能	Specific Gravity 密度	—	1.19-1.2
	Rockwell Hardness 硬度	kg/cm2	M-100
	Shear Strength 剪切强度	kg/cm2	630
	Flexural Strength 弯曲强度	kg/cm2	1050
	Tensile Strength 拉伸强度	kg/cm2	760
	Compressive Strength 抗压强度	kg/cm2	1260
ELECTRICAL 电性能	Dielectric Strength 介质强度	Kv/mm	20
	Surface Resistivity 表面电阻率	Ohm	> 10 ¹⁶
OPTICAL 光性能	Light Transmittance 导光率	%	93
	Refractive Index 折射率	—	1.49
	Specific Heat 比热容	Cal/gr°C	0.35
THERMAL 热性能	Coefficient of Thermal Conductivity 导热系数	Cal/(cm · h · °C)	0.20
	Hot Foming Temp 热成型温度	°C	140-180
	Hot Deformation Temp 热变形温度	°C	108.2
	Thermal Expansion Coefficient 热膨胀系数	Cm/cm/°C	6 × 10 ⁻⁵
	MISCELLANEOUS 其他参数	Water Absorption(24Hrs) 吸水率	%
Taste 味道		—	None
Oder 气味		—	—

Expansion and contraction 扩张和收缩

Taking an acrylic sheet 1000mm in length for example. In summer (40°C), it will lengthen to 1002mm. In winter (-30°C), it will shorten to 997mm. 以长度为1000mm的亚克力板为例，在夏季 (40°C)，它将延长到1002mm；冬季 (-30°C) 缩短至997mm。

认证/Certification

